
Circular rooflights

Typical arrangement

Indicative plan and section only. Not to scale. Not a fabrication drawing or an approved installation detail.

01 PLAN VIEW

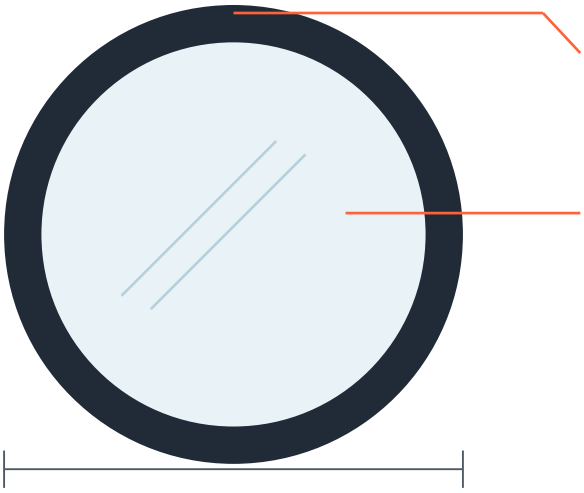


Curved aluminium frame

Rolled, welded and powder coated.

Insulating glass unit

Glass build-up and perimeter band confirmed for the opening.

02 SECTION THROUGH DIAMETER

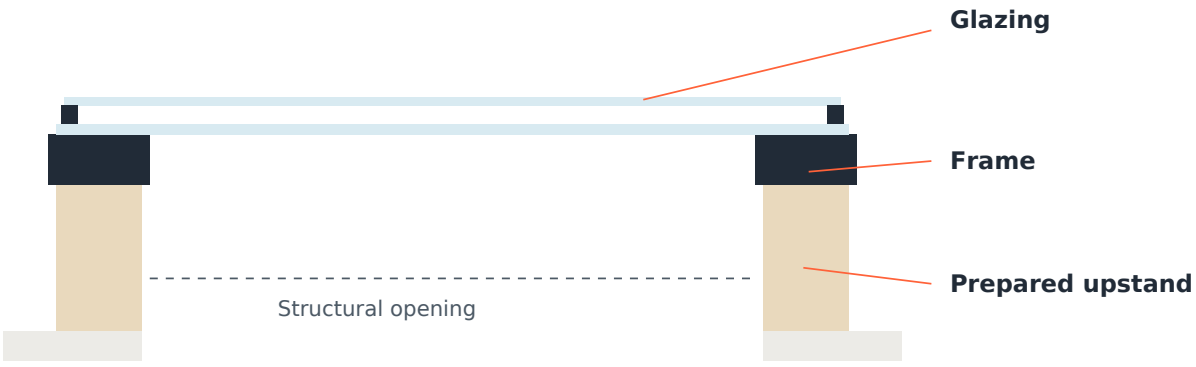

Roofing / waterproofing interface agreed with the project team.

Confirm diameter, measurement basis, fall, support, weathering and access. Frame profiles and glass thicknesses shown here are symbolic; use the approved project drawing for construction.